


AIR PEAR 60-P4

AIRIUSFANS.COM | 888-247-7327

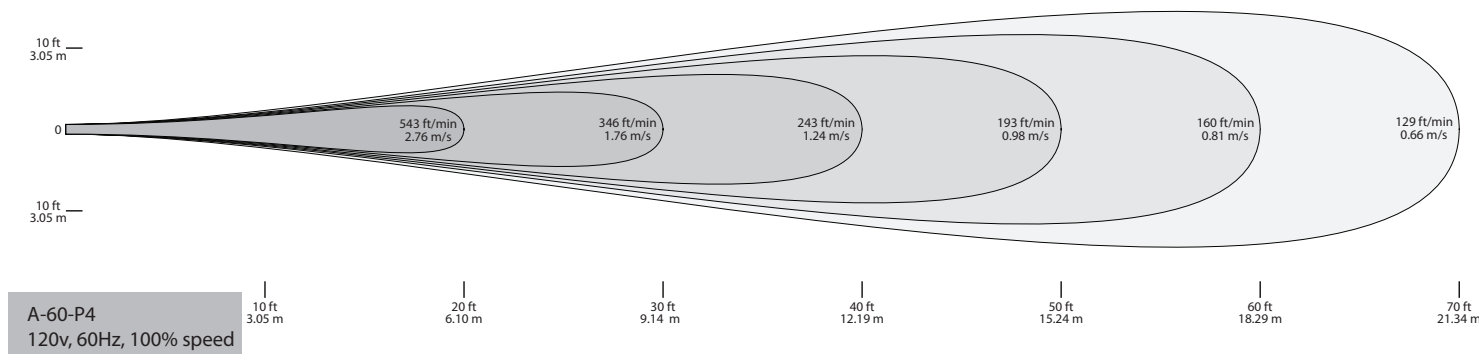

Housing: ABS, UL 94 5VA flame resistance. For increased chemical resistance to oils and alkalies.

Hardware: Stainless steel for increased corrosion resistance.

Motor: 330mm, permanent split capacitor, axial motor. Motor is thermally protected. Operating temperature: -13° F (-25° C) to 167° F (75° C). No lubrication required. Bearings are sealed.

Power Cord: 6 foot cord and plug provided for 120V fans, no plug for 277V.


Control Input: Mains power. TRIAC or voltage controller.

Stator: Patented multi-vane stator significantly increases air throw for maximizing performance.

Certification: Conforms to UL-507, CAN/CSA-C22.2 No. 1113. ETL listed in USA and Canada.

Safety Cable: 6' length steel cable (fastened to body)

Warranty: 3 years parts and workmanship.

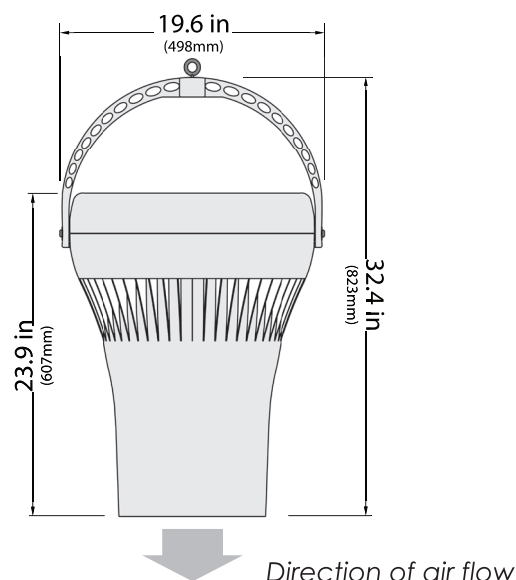

Technical Specifications

| Model | Input Power, 1 Ø | Amps | Watts | RPM | dB(A) ¹ | Weight | Colors |
|-------------------|------------------|------|-------|------|--------------------|---------|--------------------------------|
| A-60-P4-STD-120-X | 120VAC, 60Hz | 1.35 | 162 | 1489 | 42, 41, 40 | 22 lbs. | X = Off white (W) or black (B) |
| A-60-P4-STD-277-X | 277VAC, 60Hz | 0.68 | 170 | 1660 | 42, 41, 40 | 22 lbs. | X = Off white (W) or black (B) |

(1) Calculated sound pressure at 40, 50 and 60 foot distances based on non-reflective area. 75.2 dB(A) Sound Power Level, designed to meet ISO 3744 - engineering grade precision for determining sound power. Data independently verified by third party. Tests performed in-unit.

Controls & Factory Installed Options

| Item | Description |
|-----------------------------|--|
| TRIAC-120-1.5 | Wall mounted speed control. Input voltage 120VAC, 1.5A. Four step speed control and off. |
| TRIAC-120-5 | Wall mounted speed control. Input voltage 120VAC, 5A. |
| TRIAC-120-15 | Wall mounted speed control. Input voltage 120VAC, 15A. |
| TRIAC-277-5 | Wall mounted speed control. Input voltage 277VAC, 5A. |
| DeltaT-Transformer-115-Pack | 10A, 120V, Autotransformer with high/low temperature sensors. 6 control modes. |
| DeltaT-Transformer-277-Pack | 5A, 277V, Autotransformer with high/low temperature sensors. 6 control modes. |

| | | |
|-------------------|--------------------------------|-------------|
| Model: | X = Off white (W) or black (B) | Qty: |
| Controls/Options: | | Qty: |