


## DESIGNER 60-P4

AIRIUSFANS.COM | 888-247-7327

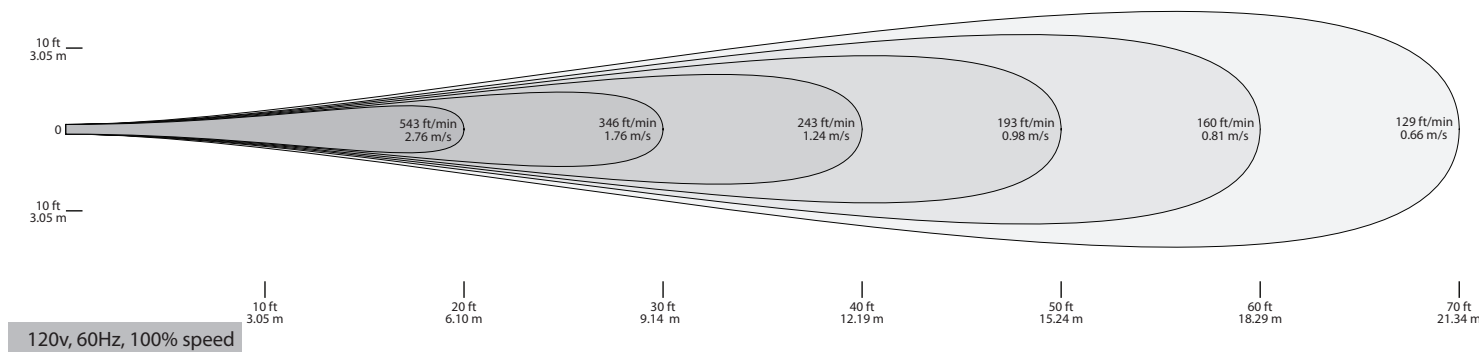

**Housing:** Aluminum powder coated off white or custom color.

**Hardware:** Stainless steel for increased corrosion resistance.

**Motor:** 330mm, permanent split capacitor, axial motor. Motor is thermally protected. Operating temperature: -13° F (-25° C) to 167° F (75° C). No lubrication required. Bearings are sealed.


**Power Cord:** 6 foot cord and plug provided for 120V fans, no plug for 277V.

**Control Input:** Mains power. TRIAC or voltage controller.

**Stator:** Multi-vane stator significantly increases air throw for maximizing performance.

**Certification:** Conforms to UL-507, CAN/CSA-C22.2 No. 1113. ETL listed in USA and Canada.

**Warranty:** 3 years parts and workmanship.

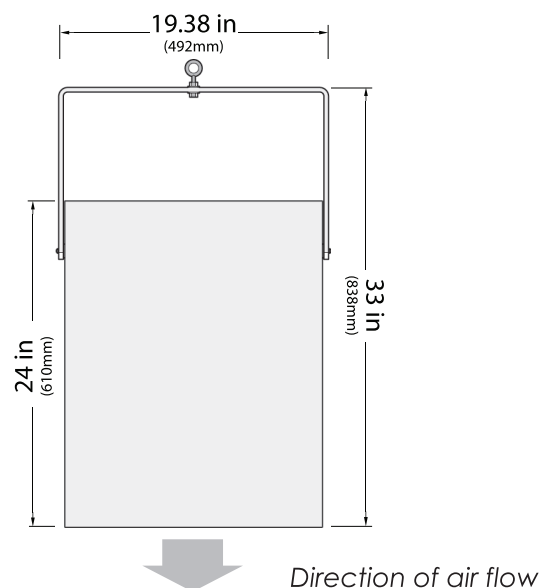

## Technical Specifications



Model	Input Power, 1 Ø	Amps	Watts	RPM	dB(A) <sup>1</sup>	Weight	Colors
D-60-P4-STD-120-(X)	120VAC, 60Hz	1.35	162	1489	42, 41, 40	38 lbs.	X = Off white (W) , custom (C)
D-60-P4-STD-277-(X)	277VAC, 60Hz	0.68	170	1660	42, 41, 40	38 lbs.	X = Off white (W) , custom (C)

(1) Calculated sound pressure at 40, 50 and 60 foot distances based on non-reflective area. 75.2 dB(A) Sound Power Level, designed to meet ISO 3744 - engineering grade precision for determining sound power. Data independently verified by third party. Tests performed in-unit.

## Controls &amp; Factory Installed Options

Item	Description
TRIAC-120-1.5	Wall mounted speed control. Input voltage 120VAC, 1.5A. Four step speed control and off.
TRIAC-120-5	Wall mounted speed control. Input voltage 120VAC, 5A.
TRIAC-120-15	Wall mounted speed control. Input voltage 120VAC, 15A.
TRIAC-277-5	Wall mounted speed control. Input voltage 277VAC, 5A.
DeltaT-Transformer-115-Pack	10A, 120V, Autotransformer with high/low temperature sensors. 6 control modes.
DeltaT-Transformer-277-Pack	5A, 277V, Autotransformer with high/low temperature sensors. 6 control modes.

<b>Model:</b>	X = Off white (W) , custom (C)	<b>Qty:</b>
Controls/Options:		Qty: