

Housing: ABS, UL 94 5VA flame resistance. For increased chemical reistance to oils and alkalies.

Hardware: Stainless steel for increased corrosion resistance.
Motor: 300mm, permanent split capacitor, single speed, axial motor. Motor is thermally protected. Operating temperature: -13° F (-25° C) to 158° F (70° C). No lubrication required. Bearings are sealed.

Power Cord: 6 foot cord and plug provided for 120V fans.

Control Input: Mains power. TRIAC or voltage controller.


Stator: Patented multi-vane stator significantly increases air throw for maximizing performance.

Bypass Intake: Increases airflow volume through side intake entrainment.

Certification: Conforms to UL-507, CAN/CSA-C22.2 No. 1113. ETL listed in USA and Canada.

Safety Cable: 6' length steel cable (fastened to body)

Warranty: 3 years parts and workmanship.

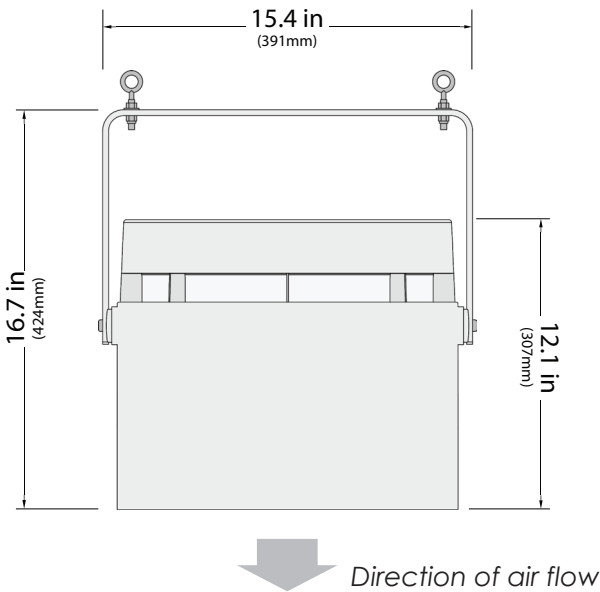

Technical Specifications

Model	Input Power, 1 Ø	Amps	Watts	RPM	dB(A) ¹	Weight	Colors
ONYX-P4-STD-120-(X)	120VAC, 60Hz	0.66	76	1573	41, 40, 39	13 lbs.	X = Off white (W) or black (B)

(1) Calculated sound pressure at 40, 45 and 50 foot distances based on non-reflective area. 73.7 dB(A) Sound Power Level, designed to meet ISO 3744 - engineering grade precision for determining sound power. Data independently verified by third party. Tests performed in-unit.

Controls & Factory Installed Options

Item	Description
TRIAC-120-1.5	Wall mounted speed control. Input voltage 120VAC, 1.5A. Four step speed control and off.
TRIAC-120-5	Wall mounted speed control. Input voltage 120VAC, 5A.
TRIAC-120-15	Wall mounted speed control. Input voltage 120VAC, 15A.
DeltaT-Transformer-115-Pack	10A, 120V, Autotransformer with high/low temperature sensors. 6 control modes.

Model:	X = Off white (W) or black (B)	Qty:
Controls/Options:		Qty: