


SUSPENDED 15-SP

AIRIUSFANS.COM | 888-247-7327

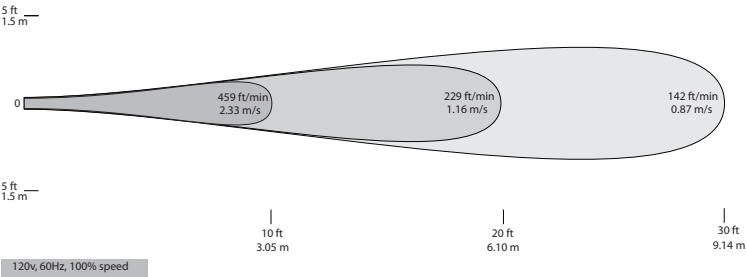

**Housing:** ABS, UL 94 5VA flame resistance. For increased chemical reistance to oils and alkalis. Used in a 2 ft. x 2 ft. acoustic ceiling.

**Hardware:** Stainless steel for increased corrosion resistance.

**Motor:** 228mm, single phase, shaded pole, axial motor. Motor is thermally protected. Operating temperature: -4° F (-20° C) to 158° F (70° C). No lubrication required. Bearings are sealed.


**Power:** A junction box and receptacle are supplied. Contractor will need to provide MC cable and wire directly to j-box/receptacle mounted to side of dome.

**Control Input:** Mains power. TRIAC or voltage controller.

**Stator:** Patented multi-vane stator significantly increases air throw for maximizing performance.

**Certification:** Conforms to UL-507, CAN/CSA-C22.2 No. 1113. ETL listed in USA and Canada.

**Warranty:** 3 years parts and workmanship.

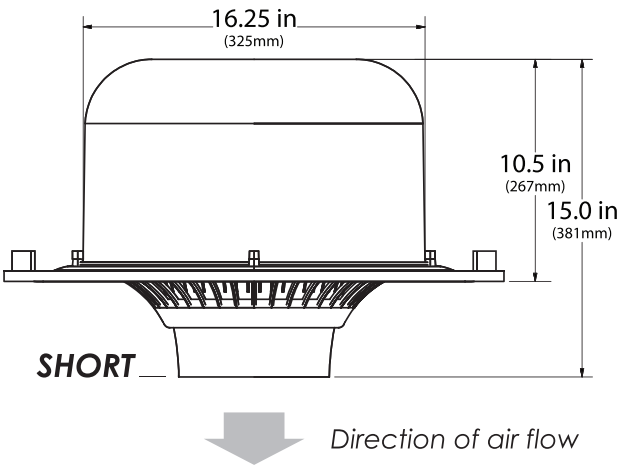

Technical Specifications

Model	Input Power, 1 Ø	Amps	Watts	RPM	dB(A) <sup>1</sup>	Weight	Colors
S-15-SP-SH-120-(X)	120VAC, 60Hz	0.18	18	1057	33, 27, 23	15 lbs.	X = Off white (W) or black (B)

(1) Calculated sound pressure at 5, 10 and 15 foot distances based on non-reflective area. 47.3 dB(A) Sound Power Level, designed to meet ISO 3744 - engineering grade precision for determining sound power. Data independently verified by third party. Tests performed in-unit.

Controls & Factory Installed Options

Item	Description
TRIAC-120-1.5	Wall mounted speed control. Input voltage 120VAC, 1.5A. Four step speed control and off.
TRIAC-120-5	Wall mounted speed control. Input voltage 120VAC, 5A.
TRIAC-120-15	Wall mounted speed control. Input voltage 120VAC, 15A.
DeltaT-Transformer-115-Pack	10A, 120V, Autotransformer with high/low temperature sensors. 6 control modes.

<b>Model:</b>	X = Off white (W) or black (B)	<b>Qty:</b>
Controls/Options:		Qty: